



9th GENERATION

STAINLESS STEEL
EVAPORATIVE CONDENSERS

MORE COST EFFECTIVE
WITH WORLD CLASS QUALITY









EC9
SERIES

MORE COST EFFECTIVE
PERFORMANCE RELIABILITY
STAINLESS STEEL WITH QUALITY

MORE
COST
EFFECTIVE

LOWEST
SHIPPING
COST

4x CHEAPER
ALL CONTAINERIZED MODEL
UP TO 3900 kW

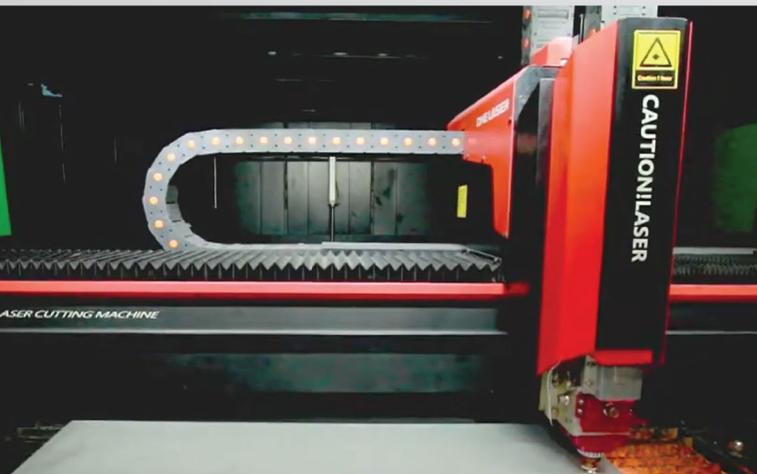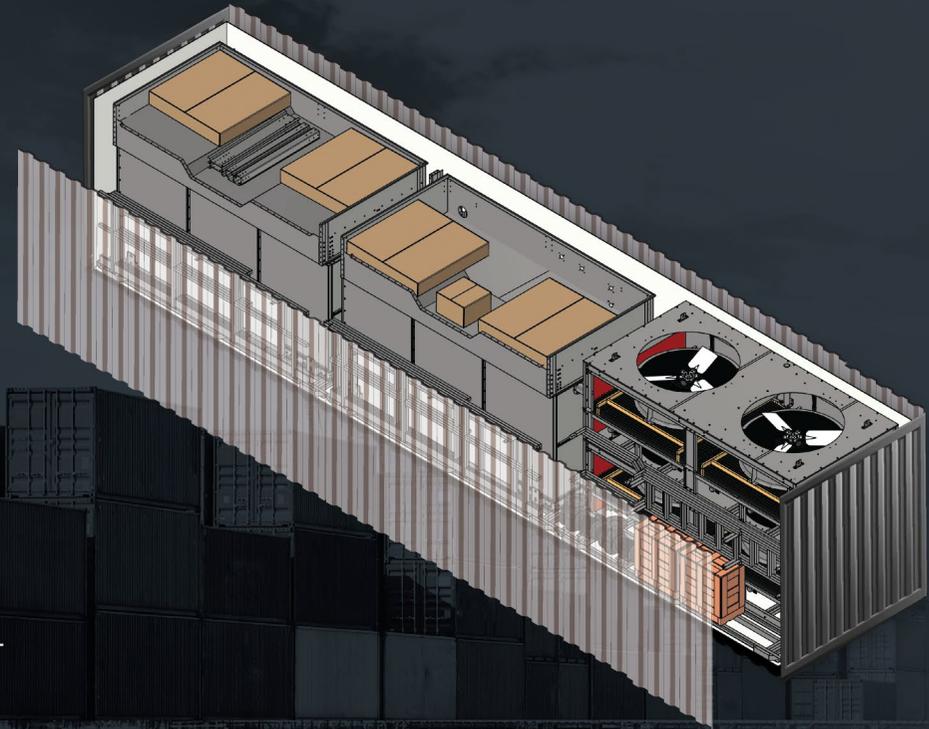

MORE
COMPETITIVE
PRICE

NEW DESIGN WITH INCREASED
PRODUCTION PERFORMANCE



PROVEN
FIELD TEST

PERFORMANCE
RELIABILITY

PERFORMANCE RATINGS ARE BASED ON
TEST PROCEDURE CTI ATC-106,
ACCEPTANCE TEST CODE FOR MECHANICAL
DRAFT EVAPORATIVE VAPOR CONDENSERS



STAINLESS STEEL
WITH QUALITY
BASED ON
ASME STANDARDS

OUR COIL IS DESIGNED WITH STAINLESS STEEL
WHICH IS SPECIFIED FOR CONDENSER TUBES
IN ACCORDANCE WITH ASME STANDARDS.

OUR SOURCES OF THIS KEY MATERIAL ARE AMONG
THE TOP OF THE INDUSTRY. WHILE OTHER GRADES
MAY LOOK THE SAME AND ARE EVEN APPLICABLE,
WE STICK TO OUR COMMITMENT OF MAKING
LONG LASTING CONDENSERS.

NOT ANY
STAINLESS STEEL
CAN BE
A CONDENSER



ALL STAINLESS STEEL GRADES LOOK THE SAME.
HOW CAN YOU BE 100% SURE YOU GET THE SPECIFICATION
IN ACCORDANCE WITH ASME STANDARDS ?

WE ASK THE SAME QUESTION AND THAT IS WHY WE INVESTED IN OUR POSITIVE MATERIAL IDENTIFICATION MACHINE (PMI).
THE MACHINE CAN TELL THE EXACT CHEMICAL COMPOSITION AND ONLY THE MATERIAL
PASSING ITS TEST CAN BE MADE INTO COILS. WE ALSO HAVE IN-HOUSE TESTING
FACILITIES THAT CAN PERFORM ASME REQUIRED TESTING PROCEDURES.



SS General Metals		
NAV Tools		
Time	31.6 sec	
#	SS-304	0.2
Ele	%	±
Cr	17.77	0.19
Ni	8.06	0.20
Mn	1.34	0.13
Fe	72.29	0.35
Cu	0.131	0.049
Co	0.320	0.156
Mo	0.066	0.018



EASIER TO REPLACE WITH COMPATIBLE FOOTPRINT

EC9 SERIES HAS BEEN DESIGNED TO MATCH THE MOST WIDELY USED FOOTPRINT TO AVOID SPACE ISSUES AND FOUNDATION MODIFICATION COSTS INCLUDING REDUCED WORKING TIME AT SITE.




COMPLIANCE STANDARD



ASME B&PV SEC VIII (DESIGN REGISTRATION)
STAINLESS STEEL CONDENSER COIL

Design in accordance with ASME standards and available to request design registration from the registration authority.

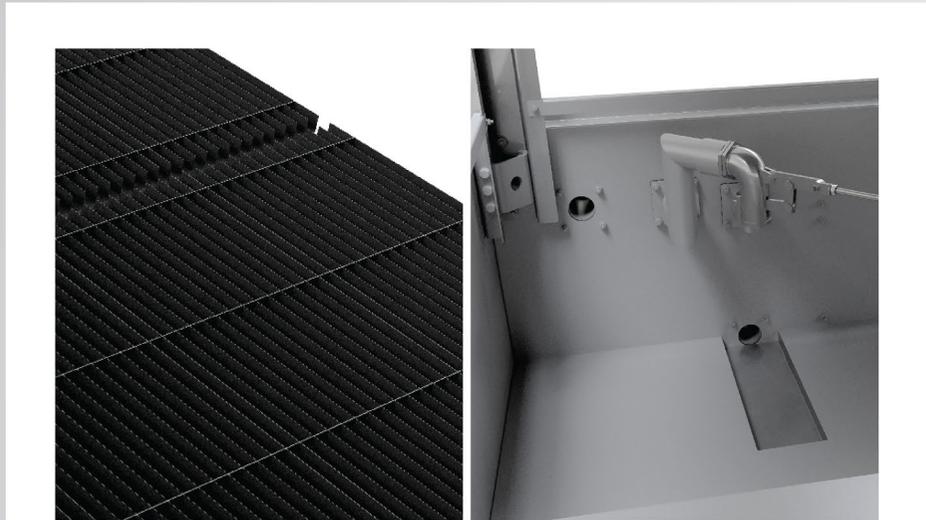

AS/NZS 3666.1 (MICROBIAL CONTROL)
AIR HANDLING AND WATER SYSTEM

Drift loss of eliminators are certified by EUROVENT, and water system are designed to be in compliance with AS/NZS 3666.1.



AS/NZS 1359.5 (AUSTRALIA MEPS)
FAN & PUMP MOTOR


For energy saving, fan and water motors are provided for Australia's requirement with MEPS standard.



AS 1657 (FIXED PLATFORMS AND LADDERS)
STAINLESS STEEL ACCESS EQUIPMENT

Platform, handrail, and ladder are designed in accordance with AS1657.

ADDITIONAL EQUIPMENT

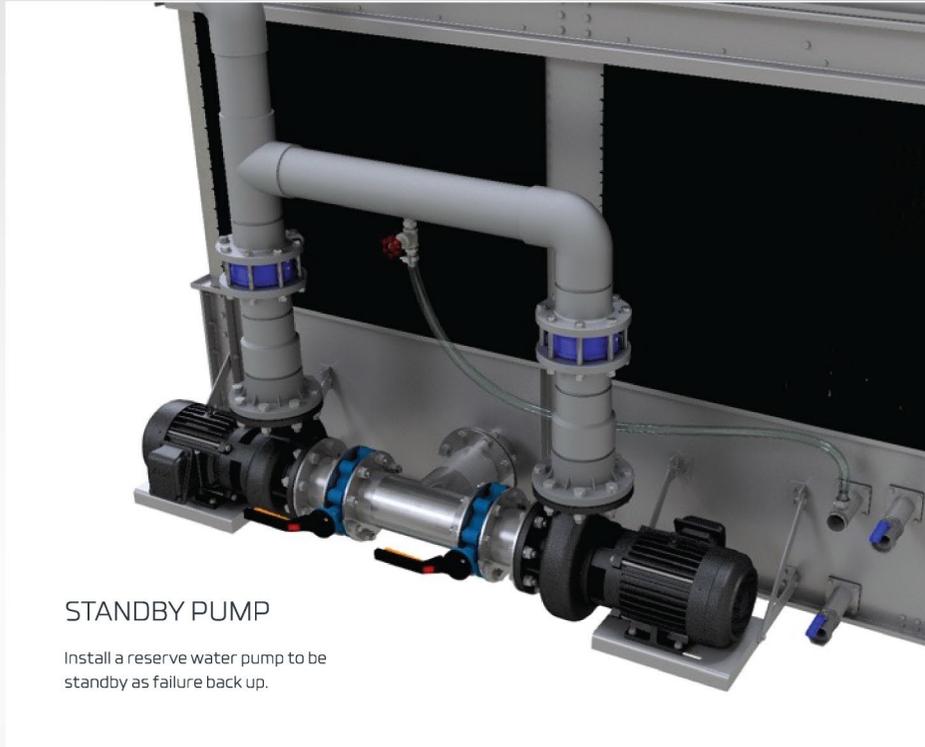


STANDBY PUMP

Install a reserve water pump to be standby as failure back up.




STAINLESS STEEL ACCESS

Come with platform, handrail, ladder including cage. Made of 304 stainless steel.

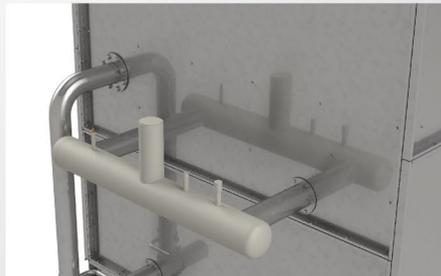

HOT GAS HEADER*

Reduce welding on-site to save installation cost. 2 material options with A53 carbon steel and 304 stainless steel.

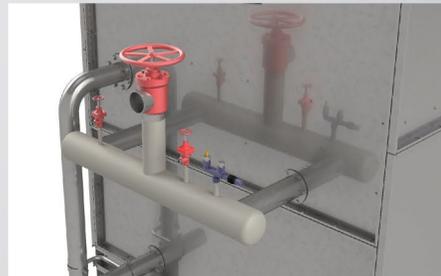

HOT GAS HEADER W/ VALVE*

Come with a stop valve at inlet, purge and equalizer including 3-way valve for connecting safety valve. There are 2 material options: A53 carbon steel and 304 stainless steel.



AUXILIARY COOLING CIRCUIT

Install auxiliary coil configurations available to allow separate process fluid loops through the same unit. There are 2 options: single-layer and double-layer.

*Note: Available for model size 8'x9', 8'x12', 8'x18' only

MODEL SELECTION METHOD

EXAMPLE

Refrigerant: Ammonia (R-717)
 Total heat rejection: 1,150 kW
 Condensing temperature: 38°C
 Entering wet bulb temperature: 28°C

SELECTION PROCEDURE

- From table 1: the heat rejection factor for R-717 at 38°C condensing temperature and 28°C entering wet-bulb temperature is 1.31.
- Multiply 1,150 kW x 1.31 = 1,506.5 kW.
- From table 2: select the unit whose base heat rejection capacity is equal or greater than 1,506.5 kW. Model EC9-1520-0718C-L.

TABLE 1: HEAT REJECTION FACTORS FOR AMMONIA (R-717)

Condensing pressure (barg)	Condensing temperature (°C)	Entering wet bulb temperature (°C)										
		20	21	22	23	24	25	26	27	28	29	30
10.31	29	1.78	1.97	2.21	2.57	2.99	-	-	-	-	-	-
10.65	30	1.63	1.79	1.99	2.21	2.56	3.00	-	-	-	-	-
11.00	31	1.43	1.55	1.69	1.90	2.15	2.50	2.84	-	-	-	-
11.36	32	1.32	1.43	1.55	1.70	1.88	2.11	2.44	-	-	-	-
11.73	33	1.19	1.27	1.37	1.50	1.63	1.81	2.03	2.37	2.70	-	-
12.10	34	1.12	1.19	1.27	1.36	1.48	1.61	1.80	2.06	2.35	-	-
12.49	35	1.03	1.08	1.15	1.23	1.30	1.39	1.53	1.69	1.90	2.15	2.47
12.88	36	0.96	1.01	1.07	1.13	1.20	1.28	1.39	1.53	1.70	1.91	2.17
13.28	37	0.88	0.92	0.97	1.03	1.08	1.16	1.23	1.36	1.48	1.65	1.88
13.69	38	0.83	0.86	0.90	0.94	1.00	1.05	1.12	1.21	1.31	1.44	1.59
14.11	39	0.78	0.81	0.84	0.88	0.92	0.98	1.03	1.12	1.20	1.31	1.44
14.53	40	0.74	0.76	0.79	0.83	0.87	0.91	0.96	1.02	1.09	1.18	1.29
14.97	41	0.69	0.72	0.74	0.77	0.80	0.84	0.88	0.93	0.99	1.08	1.18
15.41	42	0.66	0.68	0.71	0.74	0.76	0.80	0.84	0.88	0.93	0.99	1.06

REMARK:

- The model selection for other refrigerants, please contact HEATAWAY representative.
- The base heat rejection is based on ammonia (R-717) at 38°C condensing temperature and 24°C entering wet-bulb temperature.
- R-717 operating charge is at 38°C condensing temperature and 33% of coil volume.
- The operating weight includes the water weight at the overflow level and the coil is charged with ammonia (R-717).
- Dimensions are subject to change. Do not use for construction. This catalog includes data current at the time of publication, which should be reconfirmed at the time of purchase.

TABLE 2: BASE HEAT REJECTION CAPACITY

Model	Base heat rejection (kW)	Footprint	Number of container*	Total power consumption (kW)	Fan motor		Water pump	
					Q'ty	kW	Q'ty	kW
EC9-0510-0709C-S	510	2.3 x 2.7 m	1 X 40'HC	7.7	1	5.5	1	2.2
EC9-0620-0709C-S	620	2.3 x 2.7 m	1 X 40'HC	7.7	1	5.5	1	2.2
EC9-0710-0709C-S	710	2.3 x 2.7 m	1 X 40'HC	7.7	1	5.5	1	2.2
EC9-0750-0709C-S	750	2.3 x 2.7 m	1 X 40'HC	7.7	1	5.5	1	2.2
EC9-0900-0709C-L	900	2.3 x 2.7 m	1 X 40'HC	13.2	1	11.0	1	2.2
EC9-0950-0709C-L	950	2.3 x 2.7 m	1 X 40'HC	13.2	1	11.0	1	2.2
EC9-0960-0712C-L	960	2.3 x 3.6 m	1 X 40'HC	26.0	2	11.0	1	4.0
EC9-1000-0712C-S	1,000	2.3 x 3.6 m	1 X 40'HC	15.0	2	5.5	1	4.0
EC9-1120-0712C-M	1,120	2.3 x 3.6 m	1 X 40'HC	19.0	2	7.5	1	4.0
EC9-1200-0712C-L	1,200	2.3 x 3.6 m	1 X 40'HC	26.0	2	11.0	1	4.0
EC9-1270-0712C-M	1,270	2.3 x 3.6 m	1 X 40'HC	19.0	2	7.5	1	4.0
EC9-1300-0718C-S	1,300	2.3 x 5.5 m	1 X 40'HC	20.5	3	5.5	1	4.0
EC9-1320-0712C-M	1,320	2.3 x 3.6 m	1 X 40'HC	19.0	2	7.5	1	4.0
EC9-1370-0712C-L	1,370	2.3 x 3.6 m	1 X 40'HC	26.0	2	11.0	1	4.0
EC9-1400-1012C-S	1,400	3.0 x 3.6 m	1 X 40'HC	26.0	4	5.5	1	4.0
EC9-1410-0712C-L	1,410	2.3 x 3.6 m	1 X 40'HC	26.0	2	11.0	1	4.0
EC9-1520-0718C-L	1,520	2.3 x 5.5 m	1 X 40'HC	37.0	3	11.0	1	4.0
EC9-1570-0718C-S	1,570	2.3 x 5.5 m	1 X 40'HC	20.5	3	5.5	1	4.0
EC9-1600-1012C-M	1,600	3.0 x 3.6 m	1 X 40'HC	34.0	4	7.5	1	4.0
EC9-1650-1212C-S	1,650	3.6 x 3.6 m	1 X 40'HC	27.5	4	5.5	1	5.5
EC9-1660-1012C-L	1,660	3.0 x 3.6 m	1 X 40'HC	48.0	4	11.0	1	4.0
EC9-1750-0718C-M	1,750	2.3 x 5.5 m	1 X 40'HC	26.5	3	7.5	1	4.0
EC9-1760-0718C-S	1,760	2.3 x 5.5 m (1 X 40'HC) & (1 X 20'DC)		20.5	3	5.5	1	4.0
EC9-1840-1012C-M	1,840	3.0 x 3.6 m	1 X 40'HC	34.0	4	7.5	1	4.0
EC9-1890-1212C-M	1,890	3.6 x 3.6 m	1 X 40'HC	35.5	4	7.5	1	5.5
EC9-1920-1012C-L	1,920	3.0 x 3.6 m	1 X 40'HC	48.0	4	11.0	1	4.0
EC9-1980-1212C-L	1,980	3.6 x 3.6 m	1 X 40'HC	49.5	4	11.0	1	5.5
EC9-1990-0718C-M	1,990	2.3 x 5.5 m (1 X 40'HC) & (1 X 20'DC)		26.5	3	7.5	1	4.0
EC9-2000-1012C-M	2,000	3.0 x 3.6 m	1 X 40'HC	34.0	4	7.5	1	4.0
EC9-2060-0718C-M	2,060	2.3 x 5.5 m (1 X 40'HC) & (1 X 20'DC)		26.5	3	7.5	1	4.0
EC9-2080-1012C-L	2,080	3.0 x 3.6 m	1 X 40'HC	48.0	4	11.0	1	4.0
EC9-2140-0718C-L	2,140	2.3 x 5.5 m (1 X 40'HC) & (1 X 20'DC)		37.0	3	11.0	1	4.0
EC9-2150-1212C-M	2,150	3.6 x 3.6 m	1 X 40'HC	35.5	4	7.5	1	5.5
EC9-2200-0718C-L	2,200	2.3 x 5.5 m (1 X 40'HC) & (1 X 20'DC)		37.0	3	11.0	1	4.0
EC9-2250-1018C-S	2,250	3.0 x 5.5 m	2 X 40'HC	38.5	6	5.5	1	5.5
EC9-2350-1212C-M	2,350	3.6 x 3.6 m	1 X 40'HC	35.5	4	7.5	1	5.5
EC9-2460-1212C-L	2,460	3.6 x 3.6 m	1 X 40'HC	49.5	4	11.0	1	5.5
EC9-2520-1018C-M	2,520	3.0 x 5.5 m	2 X 40'HC	50.5	6	7.5	1	5.5
EC9-2550-1018C-S	2,550	3.0 x 5.5 m	2 X 40'HC	38.5	6	5.5	1	5.5
EC9-2600-1218C-S	2,600	3.6 x 5.5 m	2 X 40'HC	40.5	6	5.5	1	7.5
EC9-2860-1018C-M	2,860	3.0 x 5.5 m	2 X 40'HC	50.5	6	7.5	1	5.5
EC9-2950-1218C-S	2,950	3.6 x 5.5 m	2 X 40'HC	40.5	6	5.5	1	7.5
EC9-2990-1018C-L	2,990	3.0 x 5.5 m	2 X 40'HC	71.5	6	11.0	1	5.5
EC9-3010-1218C-M	3,010	3.6 x 5.5 m	2 X 40'HC	52.5	6	7.5	1	7.5
EC9-3120-1018C-M	3,120	3.0 x 5.5 m	2 X 40'HC	50.5	6	7.5	1	5.5
EC9-3250-1018C-L	3,250	3.0 x 5.5 m	2 X 40'HC	71.5	6	11.0	1	5.5
EC9-3400-1218C-M	3,400	3.6 x 5.5 m	2 X 40'HC	52.5	6	7.5	1	7.5
EC9-3730-1218C-M	3,730	3.6 x 5.5 m	2 X 40'HC	52.5	6	7.5	1	7.5
EC9-3900-1218C-L	3,900	3.6 x 5.5 m	2 X 40'HC	73.5	6	11.0	1	7.5

40'HC = 40-FOOT HIGH CUBE CONTAINER / 20'DC = 20-FOOT DRY CONTAINER

TABLE 3: TECHNICAL DATA

EC9 SERIES			Footprint	Model	Dimension (mm)			Approximate weight (kg)			R-717	Water	Fan motor		Water pump	
					C	U	H	Shipping	Heaviest	Operating	charge (kg)	Weight (kg)	Q'ty	kW	Q'ty	kW
	7' x 9' 2.3 x 2.7 m	EC9-0510-0709C-S	620	2,155	4,475	2,550	1,300	4,097	87	1,460	1	5.5	1	2.2		
		EC9-0620-0709C-S	860	2,395	4,715	2,860	1,610	4,432	112	1,460	1	5.5	1	2.2		
		EC9-0710-0709C-S	1,100	2,635	4,955	3,170	1,920	4,768	138	1,460	1	5.5	1	2.2		
		EC9-0750-0709C-S	1,340	2,875	5,195	3,480	2,230	5,104	164	1,460	1	5.5	1	2.2		
		EC9-0900-0709C-L	1,100	2,635	5,155	3,230	1,920	4,828	138	1,460	1	11.0	1	2.2		
	7' x 12' 2.3 x 3.6 m	EC9-0950-0709C-L	1,340	2,875	5,395	3,540	2,230	5,164	164	1,460	1	11.0	1	2.2		
		EC9-0960-0712C-L	620	2,155	4,675	3,415	1,650	5,496	121	1,960	2	11.0	1	4.0		
		EC9-1000-0712C-S	860	2,395	4,715	3,715	2,060	5,831	156	1,960	2	5.5	1	4.0		
		EC9-1120-0712C-M	860	2,395	4,915	3,775	2,060	5,891	156	1,960	2	7.5	1	4.0		
		EC9-1200-0712C-L	860	2,395	4,915	3,825	2,060	5,941	156	1,960	2	11.0	1	4.0		
		EC9-1270-0712C-M	1,100	2,635	5,155	4,185	2,470	6,336	191	1,960	2	7.5	1	4.0		
		EC9-1320-0712C-M	1,340	2,875	5,395	4,605	2,890	6,791	226	1,960	2	7.5	1	4.0		
		EC9-1370-0712C-L	1,100	2,635	5,155	4,235	2,470	6,386	191	1,960	2	11.0	1	4.0		
		EC9-1410-0712C-L	1,340	2,875	5,395	4,655	2,890	6,841	226	1,960	2	11.0	1	4.0		
		7' x 18' 2.3 x 5.5 m	EC9-1300-0718C-S	620	2,155	4,475	4,620	2,310	7,765	175	2,970	3	5.5	1	4.0	
EC9-1520-0718C-L	620		2,155	4,675	4,810	2,310	7,955	175	2,970	3	11.0	1	4.0			
EC9-1570-0718C-S	860		2,395	4,715	5,220	2,910	8,418	228	2,970	3	5.5	1	4.0			
EC9-1750-0718C-M	860		2,395	4,915	5,320	2,910	8,518	228	2,970	3	7.5	1	4.0			
EC9-1760-0718C-S	1,100		2,635	4,955	5,830	3,520	9,081	281	2,970	3	5.5	1	4.0			
EC9-1990-0718C-M	1,100		2,635	5,155	5,930	3,520	9,181	281	2,970	3	7.5	1	4.0			
EC9-2060-0718C-M	1,340		2,875	5,395	6,550	4,140	9,853	333	2,970	3	7.5	1	4.0			
EC9-2140-0718C-L	1,100		2,635	5,155	6,020	3,520	9,271	281	2,970	3	11.0	1	4.0			
EC9-2200-0718C-L	1,340		2,875	5,395	6,640	4,140	9,943	333	2,970	3	11.0	1	4.0			
10' x 12' 3.0 x 3.6 m	EC9-1400-1012C-S		860	2,395	4,715	6,100	2,495	8,796	196	2,500	4	5.5	1	4.0		
	EC9-1600-1012C-M	860	2,395	4,915	6,370	2,630	9,066	196	2,500	4	7.5	1	4.0			
	EC9-1660-1012C-L	860	2,395	4,915	6,560	2,725	9,256	196	2,500	4	11.0	1	4.0			
	EC9-1840-1012C-M	1,100	2,635	5,155	6,890	2,890	9,632	242	2,500	4	7.5	1	4.0			
	EC9-1920-1012C-L	1,100	2,635	5,155	7,090	2,990	9,832	242	2,500	4	11.0	1	4.0			
	EC9-2000-1012C-M	1,340	2,875	5,395	7,420	3,155	10,208	288	2,500	4	7.5	1	4.0			
	EC9-2080-1012C-L	1,340	2,875	5,395	7,610	3,250	10,398	288	2,500	4	11.0	1	4.0			
	10' x 18' 3.0 x 5.5 m	EC9-2250-1018C-S	860	2,395	4,715	9,570	3,955	13,261	291	3,400	6	5.5	1	5.5		
		EC9-2520-1018C-M	860	2,395	4,915	9,970	4,155	13,661	291	3,400	6	7.5	1	5.5		
		EC9-2550-1018C-S	1,100	2,635	4,955	10,350	4,345	14,110	360	3,400	6	5.5	1	5.5		
EC9-2860-1018C-M		1,100	2,635	5,155	10,750	4,545	14,510	360	3,400	6	7.5	1	5.5			
EC9-2990-1018C-L		1,100	2,365	5,155	11,040	4,690	14,800	360	3,400	6	11.0	1	5.5			
EC9-3120-1018C-M		1,340	2,875	5,395	11,530	4,935	15,360	430	3,400	6	7.5	1	5.5			
EC9-3250-1018C-L		1,340	2,875	5,395	11,810	5,075	15,640	430	3,400	6	11.0	1	5.5			
12' x 12' 3.6 x 3.6 m		EC9-1650-1212C-S	860	2,395	4,715	6,850	2,760	9,992	242	2,900	4	5.5	1	5.5		
		EC9-1890-1212C-M	860	2,395	4,915	7,120	2,895	10,262	242	2,900	4	7.5	1	5.5		
		EC9-1980-1212C-L	860	2,395	4,915	7,310	2,990	10,452	242	2,900	4	11.0	1	5.5		
	EC9-2150-1212C-M	1,100	2,635	5,155	7,740	3,205	10,936	296	2,900	4	7.5	1	5.5			
	EC9-2350-1212C-M	1,340	2,875	5,395	8,380	3,525	11,630	350	2,900	4	7.5	1	5.5			
	EC9-2460-1212C-L	1,340	2,875	5,395	8,570	3,620	11,820	350	2,900	4	11.0	1	5.5			
	12' x 18' 3.6 x 5.5 m	EC9-2600-1218C-S	860	2,395	4,715	10,800	4,350	15,154	354	4,000	6	5.5	1	7.5		
		EC9-2950-1218C-S	1,100	2,635	4,955	11,730	4,815	16,166	436	4,000	6	5.5	1	7.5		
		EC9-3010-1218C-M	860	2,395	4,915	11,200	4,550	15,554	354	4,000	6	7.5	1	7.5		
		EC9-3400-1218C-M	1,100	2,635	5,155	12,130	5,015	16,566	436	4,000	6	7.5	1	7.5		
EC9-3730-1218C-M		1,340	2,875	5,395	13,080	5,490	17,598	518	4,000	6	7.5	1	7.5			
EC9-3900-1218C-L		1,340	2,875	5,395	13,370	5,635	17,888	518	4,000	6	11.0	1	7.5			

N1 Refrigerant inlet : 4", N2 Refrigerant outlet : 4", N3 Make-up water : 2"/BSPT(F)/Ball valve, N4 Overflow: 2"/BSPT(M), N5 Drain : 2"/BSPT(F)/Ball valve, N6 Quick refill : 2"/BSPT(F)/Ball valve

HEATAWAY

WORLD CLASS QUALITY

HEATAWAY CO., LTD.

135 M.7, Khlong Preng, Mueang Chachoengsao,
Chachoengsao, Thailand, 24000

Tel. +66(0) 38-088708
E-mail: sales@heataway.net

